



CN-1205


OPERATION MANUAL

INTRODUCTION:

This model is a 12 CH. switch controller, has 12 optional channel output. A 20A circuit breaker is incorporated with this unit to protect from sudden current surge. It is widely used with variety of lighting productions.

CONTROLS & FUNCTIONS

FRONT PANEL

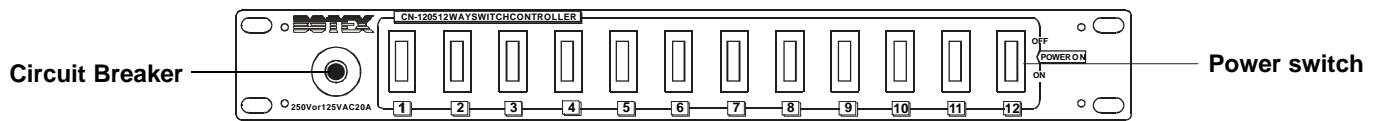

1. Circuit Breaker 20 A


When overload is occurred , it will be cut off the main power .

2. POWER ON/OFF SWITCH

Select channel by pushing the switch on .

OPERATING GUIDE

Open the cover shown as below:

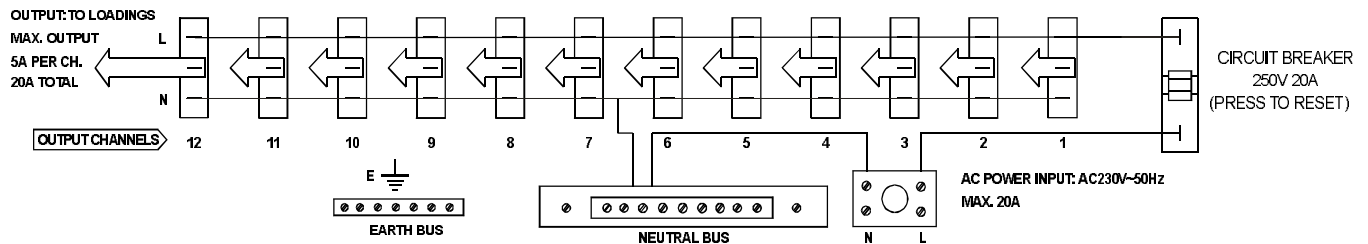

- NOTE :**
- 1: The power cable must be 3 (L, N, E) and the earth must be connected to terminal .
 - 2: L (LIVE) of loading must be connected to AC connect block shown as figure .

TECHNICAL SPECIFICATIONS:

POWER INPUT: AC 230V~50Hz or 120V~60Hz

CHANNEL OUTPUT: 5A per channel max. total 20A max.

DIMENSION : 482x280x44mm

WEIGHT : 1.1kg

WARNING :

- 1: This apparatus must be earthed .
- 2: To reduce the risk or electric shock,do not expose this apparatus to rain or moisture.
- 3: Disconnect the power before opening .

