



CT-110

OPERATION MANUAL


This model is single channel dimmer control apparatus, and is available for connection with any console for synchronous control, output current Max. 6.3A

SPECIFICATIONS:


POWER INPUT..... AC 230V~50Hz
 CHANNEL OUTPUT.....0-6.3A.
 DIMENSOINS.....135(L)x44(W)x133(H) mm
 WEIGHT..... 0.55KG

FUNCTIONS AND CONNECTIONS:

FRONT PANEL:

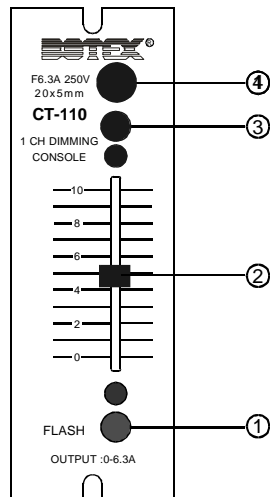

REAR PANEL

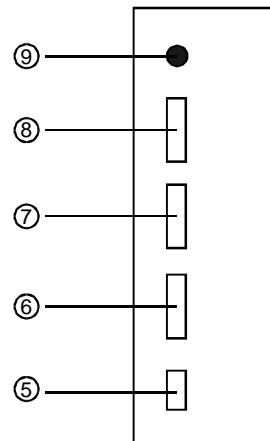

1. Flash key
When pushed down, output is strongest and independent from output selector (2)
2. Dimmer control volume
Adjust strength of output.
3. Pilot lamp
Changed by the brightness of lighting control lamp variety synchronously.
4. Fuse: F6.3A 250V 20x5 mm
5. In/out switch
Up: out Down: in
6. In/out wiring socket
7. Loading wiring socket (Max 6.3A)
8. Power AC 230V~50Hz wiring socket
9. Earth connection

CAUTION:

1. TO AVOID THE RISK OF ELECTRICAL SHOCK, DO NOT OPEN THE COVER.
2. THIS APPARATUS MUST BE EARTHED.
3. DISCONNECT THE POWER CABLE WHEN REPLACING THE FUSE.
4. TO REDUCE THE RISK OF FIRE OR ELECTRICAL SHOCK, DO NOT EXPOSE THIS APPARATUS TO RAIN OR MOISTURE.

