

Kabel Trommelware



Guitar cable
mono Jack & mono Jack

Recommended cable:
D9411B, R, U

Line cable
RCA plug & mono 6,3mm Jack

Recommended cable:
D9411B, R, U

Line cable
RCA plug & XLR

Recommended cable:
D9411B, R, U

Balanced mic. cable
3-pin XLR & mono Jack

Recommended cable:
D9411B, R, U

Balanced mic. cable
3-pin XLR & Stereo Jack

Recommended cables:
D9421U, D9434B, D9435B, D9431B, G, R, U, Y, D9432B, G, R, U, Y

Balanced mic. cable
on both sides 3-pin XLR

Recommended cables:
D9421U, D9434B, D9435B, D9431B, G, R, U, Y, D9432B, G, R, U, Y

AES EBU Digital cable
USIT DMX-512 cable

Recommended cables:
D9433B, D9433U

on both sides: 3-pin XLR

Speaker cable
3-pin XLR & 3-pin XLR

Recommended cables:
D9102, D9103, D9203, D9201, D9202

Speaker cable
3-pin XLR & mono Jack

Recommended cables:
D9101, D9102, D9103, D9203, D9201


DAP MK-SPIN

Mic/line cable
100m. on spool

Technical Information

ORDERCODE **D9421U**

• Conductor drains Ø mm:	OFC 18 x0,10
• Conductor insulation:	PE red+white
• Conductor insulation Ø in mm:	1,0
• Filler material:	-
• 1st shield:	alufoil+tinned drainwire 7x0,18
• 2nd shield:	-
• Outer isolation:	PVC dark blue
• Outer isolation Ø in mm:	3
Conductor resistance:	160 Ω/Km
Shield resistance:	-
Capacity Inner conductor:	60 pF/m
Capacity Inner cond Shield / Inner cond:	-
Working temperature min / max:	-20~60 °C
Working Voltage overflash:	30V
Non Impedance:	110 Ω

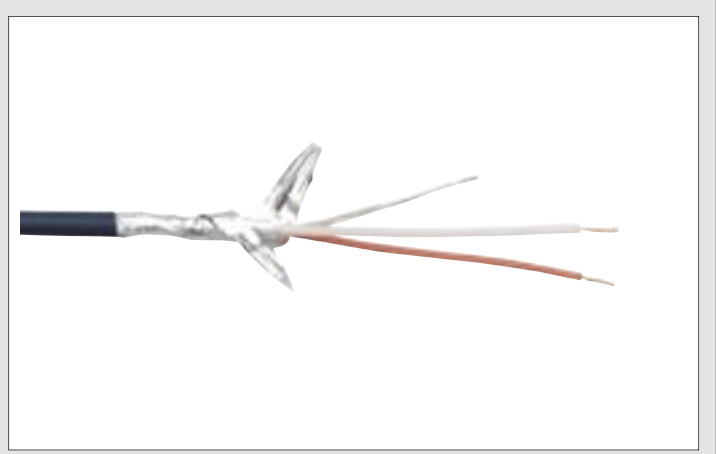

DAP MC-205

Mic/line cable
100m. on spool

Technical Information

ORDERCODE **D9434B**

• Conductor drains Ø mm:	OFC 10 x0,10
• Conductor insulation:	PE red+white
• Conductor insulation Ø in mm:	1,0
• Filler material:	-
• 1st shield:	OFC twisted 40x0,12
• 2nd shield:	-
• Outer isolation:	PVC matte black
• Outer isolation Ø in mm:	5
Conductor resistance:	160 Ω/Km
Shield resistance:	-
Capacity Inner conductor:	60 pF/m
Capacity Inner cond Shield / Inner cond:	-
Working temperature min / max:	-20~60 °C
Working Voltage overflash:	30V
Non Impedance:	110 Ω



DAP MC-206

Mic/line cable
100m. on spool

Technical Information

ORDERCODE **D9435B**

• Conductor drains Ø mm:	OFC 10 x0,10
• Conductor insulation:	PE red+blue
• Conductor insulation Ø in mm:	1,0
• Filler material:	-
• 1st shield:	OFC twisted 40x0,12
• 2nd shield:	-
• Outer isolation:	PVC black
• Outer isolation Ø in mm:	6
Conductor resistance:	160 Ω/Km
Shield resistance:	-
Capacity Inner conductor:	60 pF/m
Capacity Inner cond Shield / Inner cond:	-
Working temperature min / max:	-20~60 °C
Working Voltage overflash:	30V
Non Impedance:	110 Ω



DAP MC-216

Black mic/line cable
100m. on spool

Technical Information

• Conductor drains Ø mm:	OFC 28 x0,10
• Conductor insulation:	PE red+blue
• Conductor insulation Ø in mm:	1,5
• Filler material:	paper + cotton yarn
• 1st shield:	OFC twisted 83x0,12
• 2nd shield:	-
• Outer isolation:	PVC black,blue,red,yellow+green
• Outer isolation Ø in mm:	6
Conductor resistance:	80 Ω/Km
Shield resistance:	25 Ω/Km
Capacity Inner conductor:	60 pF/m
Capacity Inner cond Shield / Inner cond:	78 pF/m
Working temperature min / max:	-20~60 °C
Working Voltage overflash:	30V
Non Impedance:	110 Ω



Black

ORDERCODE:
D9431B

Blue

ORDERCODE:
D9431U

Red

ORDERCODE:
D9431R

Green

ORDERCODE:
D9431G

Yellow

ORDERCODE:
D9431Y




 Black
 ORDERCODE:
D9432B


 Blue
 ORDERCODE:
D9432U


 Red
 ORDERCODE:
D9432R


 Green
 ORDERCODE:
D9432G


 Yellow
 ORDERCODE:
D9432Y

DAP MC-226 Black microphone cable double isolation 100m. on spool

Technical Information

• Conductor drains Ø mm:	OFC 15 x0,12
• Conductor insulation:	PE red+white
• Conductor insulation Ø in mm:	1,5
• Filler material:	-
• 1st shield:	2xConductive plastic
• 2nd shield:	OFC twisted 96x0,12
• Outer isolation:	PVC black,blue,red,yellow+green
• Outer isolation Ø in mm:	6
Conductor resistance:	90 Ω/Km
Shield resistance:	25 Ω/Km
Capacity Inner conductor:	60 pF/m
Capacity Inner cond Shield / Inner cond:	78 pF/m
Working temperature min / max:	-20-60 °C
Working Voltage overflash:	30V
Non Impedance:	110 Ω




 Black
 ORDERCODE:
D9433B


 Blue
 ORDERCODE:
D9433U

DAP DIG-110 AES-EBU Black 110 Ohm Digital Cable 100m. on spool

Technical Information

• Conductor drains Ø mm:	OFC 18 x0,10
• Conductor insulation:	FPE red+white
• Conductor insulation Ø in mm:	1,9
• Filler material:	paper + cotton yarn
• 1st shield:	OFC braided 128x0,12
• 2nd shield:	-
• Outer isolation:	PVC black+blue
• Outer isolation Ø in mm:	6
Conductor resistance:	130 Ω/Km
Shield resistance:	12,5 Ω/Km
Capacity Inner conductor:	35 pF/m
Capacity Inner cond Shield / Inner cond:	52 pF/m
Working temperature min / max:	-20-60 °C
Working Voltage overflash:	30V
Non Impedance:	110 Ω



DAP MCD-224 Dual line cable 100m. on spool

Technical Information ORDERCODE **D9422U**

• Conductor drains Ø mm:	OFC 20x0,12
• Conductor insulation:	PE
• Conductor insulation Ø in mm:	1,4
• Filler material:	-
• 1st shield:	OFC braided
• 2nd shield:	-
• Outer isolation:	PVC black
• Outer isolation Ø in mm:	2x4
Conductor resistance:	80 Ω/Km
Shield resistance:	25 Ω/Km
Capacity Inner conductor:	65 pF/m
Capacity Inner cond Shield / Inner cond:	82 pF/m
Working temperature min / max:	-20-60 °C
Working Voltage overflash:	30V
Non Impedance:	100 Ω





DAP LC-126

Black line cable a-symmetric
100m on spool

Technical Information

- Conductor drains \emptyset mm: OFC 7x0,20
- Conductor insulation: PE transparant
- Conductor insulation \emptyset in mm: 2,4
- Filler material: -
- 1st shield: Conductive plastic
- 2nd shield: OFC 50x0,14
- Outer isolation: PVC black, red, blue
- Outer isolation \emptyset in mm: 6

Conductor resistance:	80 Ω /Km
Shield resistance:	25 Ω /Km
Capacity Inner conductor:	-
Capacity Inner cond Shield / Inner cond:	65 pF/m
Working temperature min / max:	-20-60 $^{\circ}$ C
Working Voltage overflash:	30V
Non Impedance:	50 Ω



Black

ORDERCODE:
D9411B

Blue

ORDERCODE:
D9411U

Red

ORDERCODE:
D9411R

Powermulticore

DAP PMC-216

AUDIO Power/Signal Cable
price per meter

Technical Information

ORDERCODE **D9481**

- Conductor drains \emptyset mm: OFC 20x0,10 (NF) & 3x1,5 (power)
- Conductor insulation: PE red+white & PVC black (power)
- Conductor insulation \emptyset : 1,3mm (NF) & 3,7mm (power)
- Filler material: paper+cotton yarn
- 1st shield: twisted tinned copper NF 96x0,10
- 2nd shield: -
- Outer isolation: PVC matte black
- Outer isolation \emptyset : 4mm (NF) & 12mm (power)

Conductor resistance:	80 Ω /Km
Shield resistance:	30 Ω /Km
Capacity Inner conductor:	60 pF/m
Capacity Inner cond Shield / Inner cond:	78 pF/m
Working temperature min / max:	-20-60 $^{\circ}$ C
Working Voltage overflash:	30V
Non Impedance:	110 Ω



DAP PSC-211


Power/Signal Cable
price per meter


Technical Information

ORDERCODE **D9482**

- Conductor drains \emptyset mm: OFC 20x0,10 (NF) & 3x1,5 (power)
- Conductor insulation: PE red+black & PVC black (power)
- Conductor insulation \emptyset : 1,3mm (NF)
- Filler material: paper
- 1st shield: twisted copper NF 96x0,10
- 2nd shield: -
- Outer isolation: PVC matte blue
- Outer isolation \emptyset : 4mm (NF) & 11mm (power)


Conductor resistance:	80 Ω /Km
Shield resistance:	30 Ω /Km
Capacity Inner conductor:	60 pF/m
Capacity Inner cond Shield / Inner cond:	78 pF/m
Working temperature min / max:	-20-60 $^{\circ}$ C
Working Voltage overflash:	30V
Non Impedance:	110 Ω

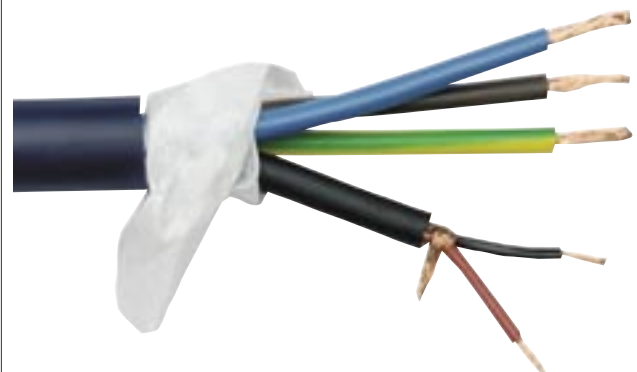

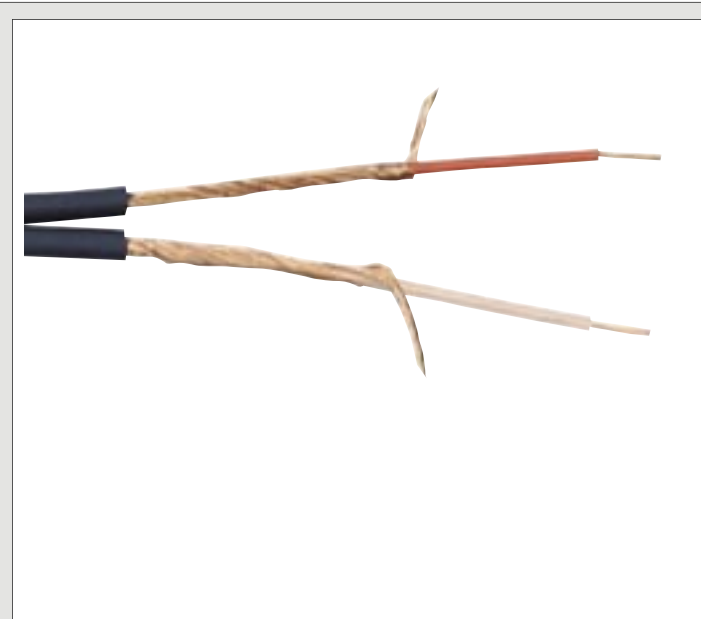


DAP AV-36 Audio/Video Cable A-symmetric 75 Ohm 100m. on spool

Technical Information		ORDERCODE D9401
• Conductor drains Ø mm:	OFC 20x0,12	
• Conductor insulation:	PE red + transparent	
• Conductor insulation Ø in mm:	1,3	
• Filler material:	-	
• 1st shield:	OFC twisted 32x0,12	
• 2nd shield:	-	
• Outer isolation:	PVC dark blue	
• Outer isolation Ø in mm:	2x3	
Conductor resistance:	80 Ω/Km	
Shield resistance:	50 Ω/Km	
Capacity Inner conductor:	-	
Capacity Inner cond Shield / Inner cond:	160 pF/m	
Working temperature min / max:	-20-60 °C	
Working Voltage overflash:	30V	
Non Impedance:	35 Ω	
Attenuation:		
10MHz:	0,02480	
90MHz:	0,28000	
100MHz:	0,28530	
220MHz:	0,55350	
470MHz:	1,33130	
770MHz:	2,21180	
1000Mhz:	3,0271	

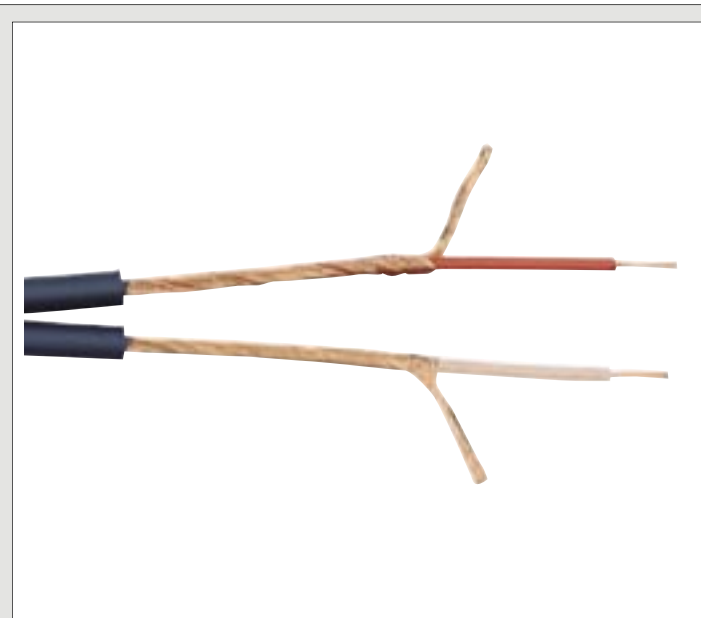

DAP AV-48 Audio/Video Cable A-symmetric 75 Ohm 100m. on spool

Technical Information		ORDERCODE D9402
• Conductor drains Ø mm:	OFC 20x0,12	
• Conductor insulation:	PE red + transparent	
• Conductor insulation Ø in mm:	1,3	
• Filler material:	-	
• 1st shield:	OFC twisted 32x0,12	
• 2nd shield:	-	
• Outer isolation:	PVC dark blue	
• Outer isolation Ø in mm:	2x4	
Conductor resistance:	80 Ω/Km	
Shield resistance:	50 Ω/Km	
Capacity Inner conductor:	-	
Capacity Inner cond Shield / Inner cond:	160 pF/m	
Working temperature min / max:	-20-60 °C	
Working Voltage overflash:	30V	
Non Impedance:	35 Ω	
Attenuation:		
10MHz:	0,02480	
90MHz:	0,28000	
100MHz:	0,28530	
220MHz:	0,55350	
470MHz:	1,33130	
770MHz:	2,21180	
1000Mhz:	3,0271	

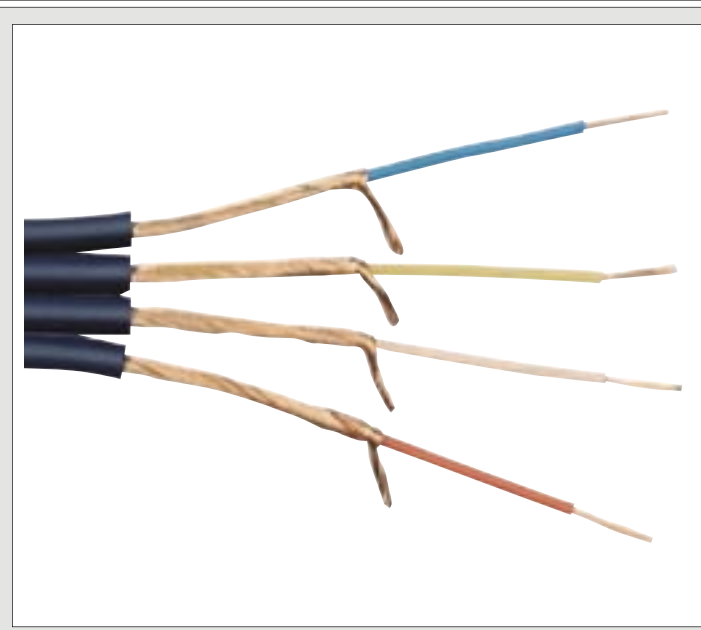

DAP AV-84 4-way Audio/Video Cable A-symmetric 75 Ohm 100m. on spool

Technical Information		ORDERCODE D9403
• Conductor drains Ø mm:	OFC 20x0,12	
• Conductor insulation:	PE red+transparent+yellow+blue	
• Conductor insulation Ø in mm:	1,3	
• Filler material:	-	
• 1st shield:	OFC twisted 32x0,12	
• 2nd shield:	-	
• Outer isolation:	PVC dark blue	
• Outer isolation Ø in mm:	4x4	
Conductor resistance:	80 Ω/Km	
Shield resistance:	50 Ω/Km	
Capacity Inner conductor:	-	
Capacity Inner cond Shield / Inner cond:	160 pF/m	
Working temperature min / max:	-20-60 °C	
Working Voltage overflash:	30V	
Non Impedance:	35 Ω	
Attenuation:		
10MHz:	0,02480	
90MHz:	0,28000	
100MHz:	0,28530	
220MHz:	0,55350	
470MHz:	1,33130	
770MHz:	2,21180	
1000Mhz:	3,0271	

DAP AV-14

Audio/Video Cable 75 Ohm
100m. on spool

Technical Information

ORDERCODE **D9461**

- Conductor drains Ø mm: 0,4
- Conductor insulation: PE
- Conductor insulation Ø in mm: 2,6
- Conductor resistance Ω/m: 138 Ω/Km
- Outer insulation: PVC 4,2 Ø in mm
- Working temperature min / max: -20~50 °C
- Voltage overflash: 30V
- Nominal impedance: 75 Ω

Attenuation:

10MHz: 0,02270
90MHz: 0,18650
100MHz: 0,19060
220MHz: 0,30640
470MHz: 0,76580
770MHz: 0,96420
1000Mhz: 1,6122



DAP AV-80

Double Shielded Video Cable 75 Ohm
100 m. on spool

Technical Information

- Conductor drains Ø mm: 0,58
- Conductor insulation: PE
- Conductor insulation Ø in mm: 3,71
- Conductor resistance Ω/m: 65 Ω/Km
- Outer insulation: PVC 6,2 Ø in mm
- Working temperature min / max: -20~50 °C
- Voltage overflash: 30V
- Nominal impedance: 75 Ω

Attenuation:

10MHz: 0,01020
90MHz: 0,07210
100MHz: 0,06840
220MHz: 0,11920
470MHz: 0,20150
770MHz: 0,28750
1000Mhz: 0,35850



Black

ORDERCODE:
D9463B



White

ORDERCODE:
D9463W

DAP AV-100

Super-Flex Shielded Video Cable 75 Ohm
100m. on spool

Technical Information

ORDERCODE **D9462**

- Conductor drains Ø mm: 0,58
- Conductor insulation: PE
- Conductor insulation Ø in mm: 3,71
- Conductor resistance Ω/m: 65 Ω/Km
- Outer insulation: PVC 4,2 Ø in mm
- Working temperature min / max: -20~50 °C
- Voltage overflash: 30V
- Nominal impedance: 75 Ω

Attenuation:

10MHz: 0,02270
90MHz: 0,18650
100MHz: 0,19060
220MHz: 0,30640
470MHz: 0,76580
770MHz: 0,96420
1000Mhz: 1,6122



DAP AV-500

5 Way Video Cable 75 Ohm
price per meter

Technical Information


ORDERCODE **D9466**

- Conductor drains Ø mm: 0,58
- Conductor insulation: PE
- Conductor insulation Ø in mm: 3,71
- Conductor resistance Ω/m: 65 Ω/Km
- Outer insulation: PVC 4,2 Ø in mm
- Working temperature min / max: -20~50 °C
- Voltage overflash: 30V
- Nominal impedance: 75 Ω



DAP SPE-275 Speakercable 2x0.75mm
100m on spool

Technical Information		ORDERCODE D9101
• Conductor drains Ø mm:	OFC 2x0,75	
• Conductor construction strands:	2x 49 x 0,14 Ø	
• Conductor insulation Ø in mm:	PVC 2x2,8	
• Conductor resistance Ω/m:	0,03	
• Outer insulation:	2,8x5,6 (PVC black & black/red)	
• Working temperature min / max:	-10~60 °C	
• Voltage overflash:	250V	
• Minimum order length:	100m on spool	

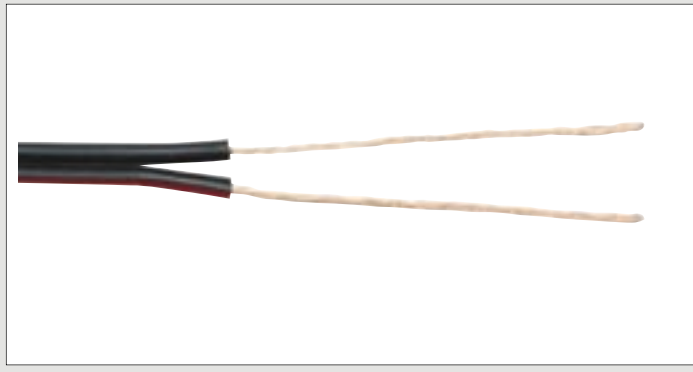

DAP SPE-215 Speakercable 2x1.5mm
100m on spool

Technical Information		ORDERCODE D9102
• Conductor drains Ø mm:	OFC 2x1,5	
• Conductor construction strands:	2x 7x 14x0,14 Ø	
• Conductor insulation Ø in mm:	PVC 2x 3,2	
• Conductor resistance Ω/m:	0,014	
• Outer insulation:	4x8 (PVC black & black/red)	
• Working temperature min / max:	-10~60 °C	
• Voltage overflash:	250V	
• Minimum order length:	100m on spool	




DAP SPE-225 Speakercable 2x2.5mm
100m on spool

Technical Information		ORDERCODE D9103
• Conductor drains Ø mm:	OFC 2x2,5	
• Conductor construction strands:	2x 7x 24x0,14 Ø	
• Conductor insulation Ø in mm:	PVC 2x 4	
• Conductor resistance Ω/m:	0,01	
• Outer insulation:	4x8 (PVC black & black/red)	
• Working temperature min / max:	-10~60 °C	
• Voltage overflash:	250V	
• Minimum order length:	100m on spool	




DAP SPC-225 Stage Speakercable 2x2.5mm
100m on spool

Technical Information		ORDERCODE D9203
• Conductor drains Ø mm:	OFC 2x2,5	
• Conductor construction strands:	2x 7x 30x0,14 Ø	
• Conductor insulation Ø in mm:	PE	
• Conductor resistance Ω/m:	0,01	
• Outer insulation:	PVC 7,7mm Ø matte blue	
• Working temperature min / max:	-10~60 °C	
• Voltage overflash:	250V	
• Minimum order length:	100m on spool	

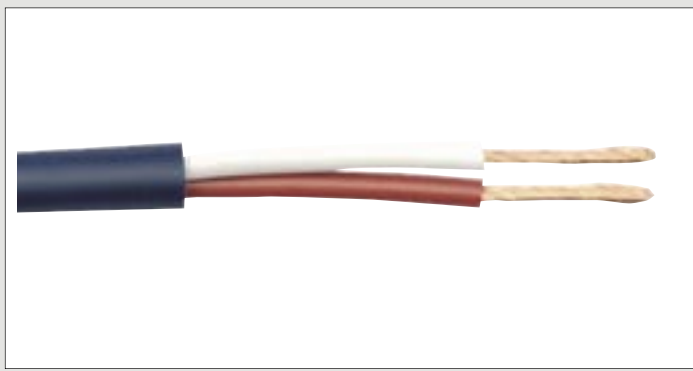

DAP SPC-240 Speakercable
50m on spool

Technical Information		ORDERCODE D9206
Conductor drains Ø mm:	OFC 2x4	
Conductor construction strands:	2x7x50x0,12 Ø	Conductor insulation Ø in mm: 8,5 PE
Conductor resistance Ω/m:	0,006	
Outer insulation:	PVC 9,5mm Ø matte grey	
Working temperature min / max:	-10~60 °C	
Voltage over-flash:	250V	
Minimum order length:	50m on spool	

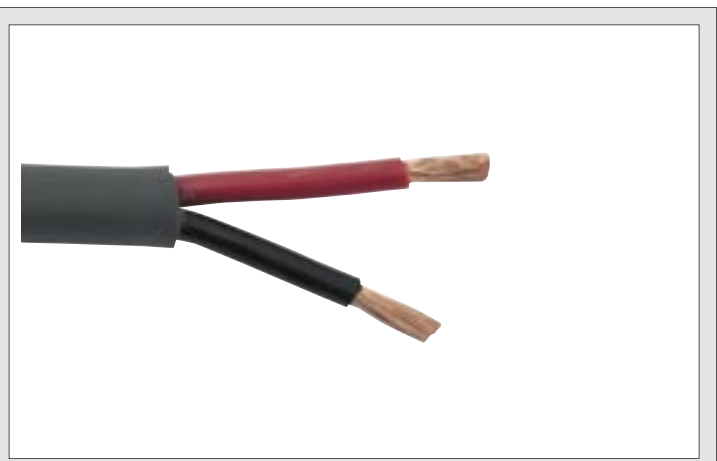

DAP SPK-275

Stage Speakercable 2x0.75mm
100m on spool

Technical Information

ORDERCODE **D9201**

- Conductor drains Ø mm: OFC 2x0,75
- Conductor construction strands: 2x 49x0,14 Ø
- Conductor insulation Ø in mm: PE
- Conductor resistance Ω/m: 0,03
- Outer insulation: PVC 6,5mm Ø matte blue
- Working temperature min / max: -10~60 °C
- Voltage overflash: 250V
- Minimum order length: 100m on spool



DAP SPK-215

Stage Speakercable 2x1.5mm
100m on spool

Technical Information

ORDERCODE **D9202**

- Conductor drains Ø mm: OFC 2x1,5
- Conductor construction strands: 2x 7x 20x0,12 Ø
- Conductor insulation Ø in mm: PE
- Conductor resistance Ω/m: 0,014
- Outer insulation: PVC 8mm Ø matte blue
- Working temperature min / max: -10~60 °C
- Voltage overflash: 250V
- Minimum order length: 100m on spool



DAP SPK-225

Stage Speakercable 2x2.5mm
100m on spool

Technical Information

ORDERCODE **D9204**

- Conductor drains Ø mm: OFC 2x2,5
- Conductor construction strands: 2x 7x 30x0,12 Ø
- Conductor insulation Ø in mm: PE
- Conductor resistance Ω/m: 0,01
- Outer insulation: PVC 9mm Ø matte blue
- Working temperature min / max: -10~60 °C
- Voltage overflash: 250V
- Minimum order length: 100m on spool



DAP SPK-240


Stage Speakercable 2x4mm
50m on spool

Technical Information

ORDERCODE **D9205**


- Conductor drains Ø mm: OFC 2x4
- Conductor construction strands: 2x 7x 50x0,12 Ø
- Conductor insulation Ø in mm: PE
- Conductor resistance Ω/m: 0,006
- Outer insulation: PVC 10mm Ø matte blue
- Working temperature min / max: -10~60 °C
- Voltage overflash: 250V
- Minimum order length: 50m on spool



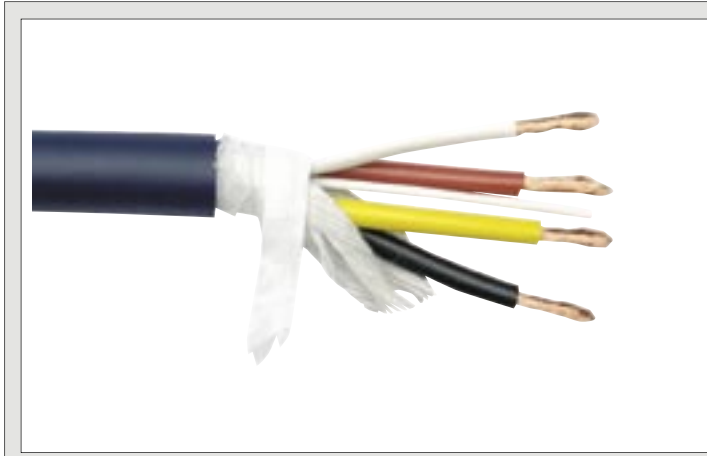

DAP SPK-425 MKII Stage speaker cable 4x 4,5mm Twist protection 100m on spool

Technical Information		ORDERCODE D9305
• Conductor drains Ø mm:	OFC 4x2,5	
• Conductor construction strands:	7x 72x0,08 Ø	
• Conductor insulation Ø in mm:	PE	
• Conductor resistance Ω/m:	0,01	
• Outer insulation:	PVC 13mm Ø matte blue	
• Working temperature min / max:	-10~60 °C	
• Voltage overflash:	250V	
• Minimum order length:	50m on spool	

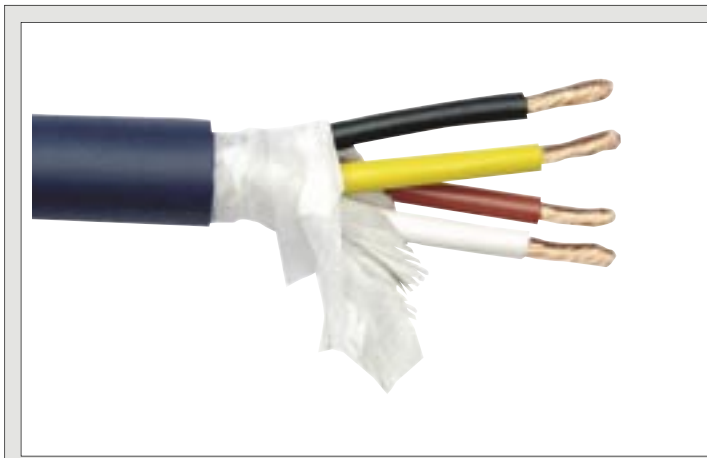


DAP SPK-440 Stage Multi Speaker cable 4x4mm 50m on spool

Technical Information		ORDERCODE D9302
• Conductor drains Ø mm:	OFC 4x4	
• Conductor construction strands:	4x7x 50x0,12 Ø	
• Conductor insulation Ø in mm:	PE	
• Conductor resistance Ω/m:	0,006	
• Outer insulation:	PVC 16mm Ø matte blue	
• Working temperature min / max:	-10~60 °C	
• Voltage overflash:	250V	
• Minimum order length:	50m on spool	

DAP SPK-645 Stage Multi Speaker cable 4x2.5mm + 2x2.5mm 50m on spool

Technical Information		ORDERCODE D9303
• Conductor drains Ø mm:	4x 4mm OFC 2x2,5mm OFC	
• Conductor construction strands:	4x7x 50x0,12 Ø 2x7x30x0,12Ø	
• Conductor insulation Ø in mm:	PE	
• Conductor resistance Ω/m:	0,006	
• Outer insulation:	PVC 18mm Ø matte blue	
• Working temperature min / max:	-10~60 °C	
• Voltage overflash:	250V	
• Minimum order length:	50m on spool	

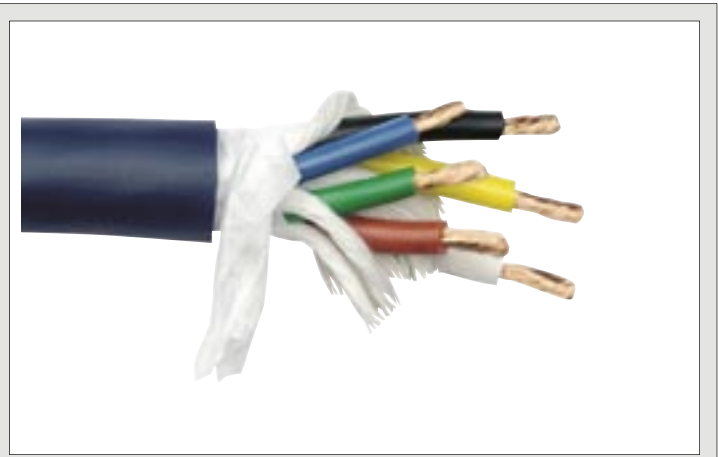

DAP SPK-825 Stage Multi Speaker cable 8x2.5mm price per meter

Technical Information		ORDERCODE D9304
• Conductor drains Ø mm:	OFC 8x2,5	
• Conductor construction strands:	8x7x 30x0,12 Ø	
• Conductor insulation Ø in mm:	PE	
• Conductor resistance Ω/m:	0,01	
• Outer insulation:	PVC 16,5mm Ø matte blue	
• Working temperature min / max:	-10~60 °C	
• Voltage overflash:	250V	
• Minimum order length:	1 m.	

